



CLEAN BY DESIGN

TECHNICAL SPECIFICATIONS | HAND SANITIZING FIXTURE



Vaask (V-ahh-sk) is inspired by the Norwegian word for "wash" and embodies the desire for a more modern class of clean. This unique, U.S.-manufactured system complements the style of your space while delivering a sanitizing experience that's engineered for zero mess and very little maintenance. The built-in Vaask dispenser promotes better health for users and demonstrates a strong commitment to cleanliness.

FINISHES



METALS



TEXTURE



ANY COLOR



MIX & MATCH



ART



LOGOS

SENSORS

- PalmPilot® hand-detection system driven by a suite of advanced sensors
- High-accuracy laser range sensor
- Auto fluid retraction algorithm
- Optical 'empty' detection sensor

MAINTENANCE

- Backed by a 5-year warranty – no surprise repair costs
- Easily repairable components for added sustainability

CONSTRUCTION

- Cast aluminum exterior components available with premium powder coating, metal plating or custom artwork
- Durable internal enclosure made of powder-coated steel
- Laboratory-grade pump

LIGHTING

- Choice of blue or warm white light
- 3 animation modes designed to attract users' attention
- Visually alerts staff when sanitizer level is low

SANITIZER CARTRIDGE

- Sustainable, refillable and swappable cartridge
- 2 L (68 oz) maximum capacity
- 2,800 uses each
- Compatible with approved, alcohol-based gel formulations

POWER

- Hardwired AC (110V-220V)
- 0.8 amp required power
- No dedicated circuit needed—daisy chain off of existing junction boxes

MOUNTING

- Made for hollow wall cavities of 3.5 inches or deeper
- Attaches with included flags or direct-to-stud screws
- Recommended mounting height of 32 inches to 42 inches from bottom of fixture to finished floor




WEIGHT

- 16.5 lb (7.5 kg) with full cartridge


COMPLIANCE

- Meets ADA, NFPA, CB, CE, SII and FCC requirements
- SGS NRTL safety tested per UL 60335-1

DIMENSIONS

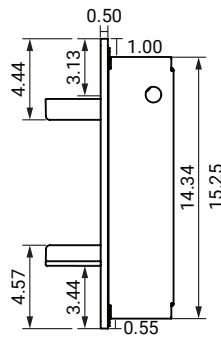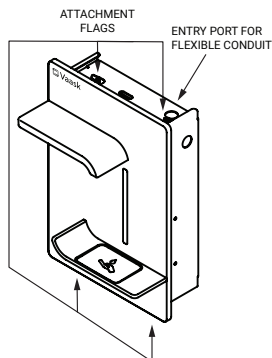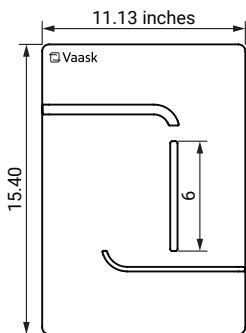

ATTACHMENT OPTION B
HOLES FOR ATTACHMENT STUDS.
USE PAN HEAD SCREWS

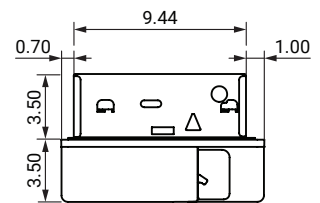

Specifications subject to change without notice.

Rev. VCHS-D

Download the three-part spec and Revit files at Vaask.com/specs

